

# APD 125-6

Cummins  
Akso  
D+&''



2000/14/EC

&\$\$\$( / #

z\*\$' z'%\$'D:

	"	"	"	"	Amp
480/277		125,00		118,00	177,00
380/220		123,00		112,00	212,00
208/120		125,00		177,00	125,00

## Standard Specifications

(\*#\$\$s

## ALTERNATOR


## TRANSFER SWITCH

Manufacturer		Cummins		
Model		6BTAA5,9G2		
	L	5,90		
	"	102x120		
		17,5:1		
fl # ı	"# "	1800		
fl "ı	L	16,50		
	L	27,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	12,00		
	' # "	30,00		
	° C	494		
		24 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "			
		34,00	26,00	18,00

		Aksa
		A104-4
	Hz	60
	"	118
7 cg'		0,80
		3
fl ı		480/277
	A	177
Temperatur		H

		fl "ı		fl "ı	
	"	"	"	"	L
APD 125-6	1370	2300	1020	1500	195
		fl "ı		fl "ı	
	"	"	"	"	L
ASM 5C	1780	3220	1060	1750	195

D+&

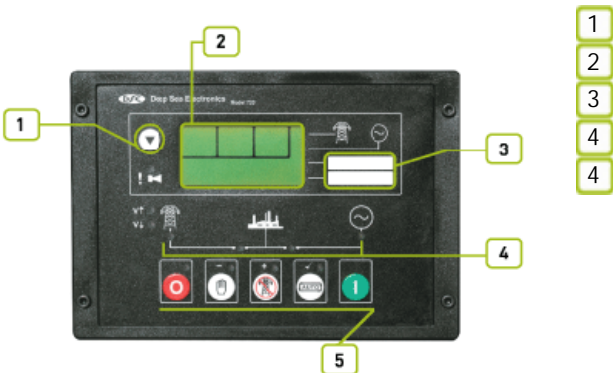



f@Bt  
f@%&@t  
f@%&@Bt

#

#

6G'9B \*\$-\$) \$  
6G'9B \*%\$\$!\*&  
6G'9B \*%\$\$!\*(

GA 8

%, !&\* \$

%)

ž

ž

!%&

"

ž

5GA 711



1. 5GA 711

2. 5GA 711

3. 5GA 711

4. 5GA 711

5. 5GA 711

6. 5GA 711

7. 5GA 711

8. 5GA 711

9. 5GA 711

	"	1060
fl "L	"	3220
fl "L	"	1750
		195