

AC 1265-6

Cummins
Stamford
D+ &




ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC &\$\$\$(#
z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		1265,00		1128,00	1690,00
380/220		1179,00		1027,00	2036,00
208/120					

Standard Specifications


Standard Specifications

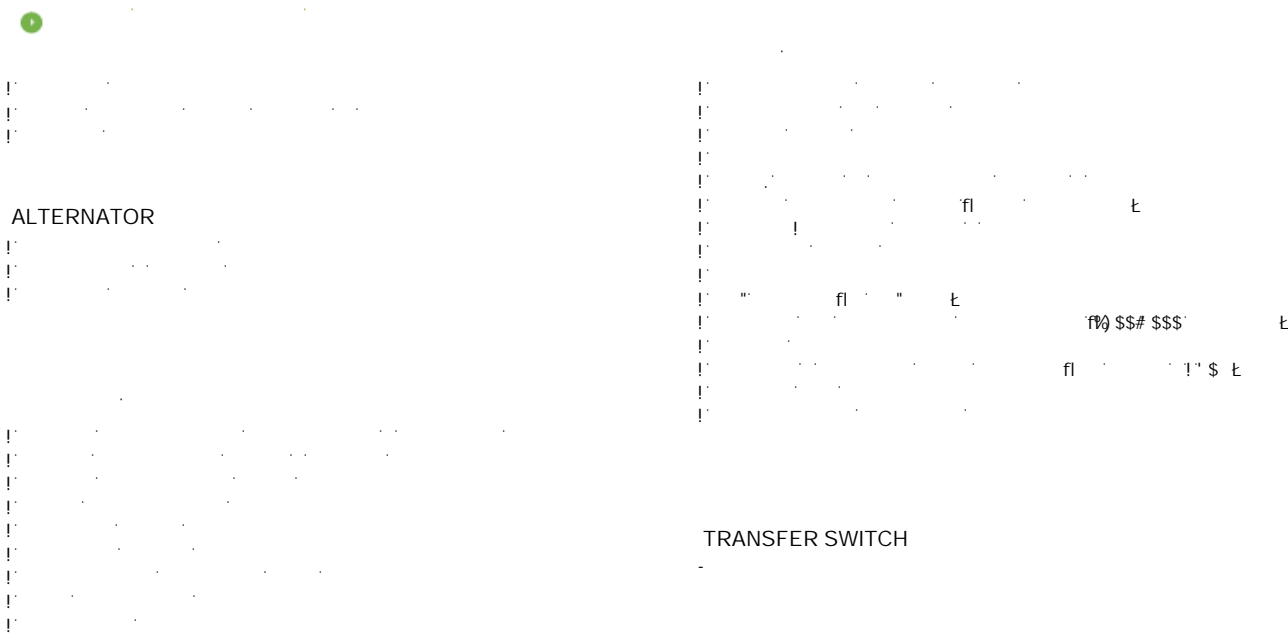

Manufacturer		Cummins		
Model		KTA 50-G3		
	L	50,30		
	"	159 X 159		
		13,9:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	177,00	
		L	410,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	110,50		
	' # "	258,00		
	° C	475		
		24 V d.c.		
	Load	%"\$!ı	'+)ı)\$ı
	# "			
		291,00	222,00	157,00

		Stamford
		PI 734 B
	Hz	60
	"	1352
7 cg'		0,80
		3
	fl Ł	480/277
	A	2032
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
AC 1265-6	9600	4960	2120	2450	2000
		fl "Ł		fl "Ł	
	"	"	"	"	L
AKS 100	14700	9130	2300	2470	1200

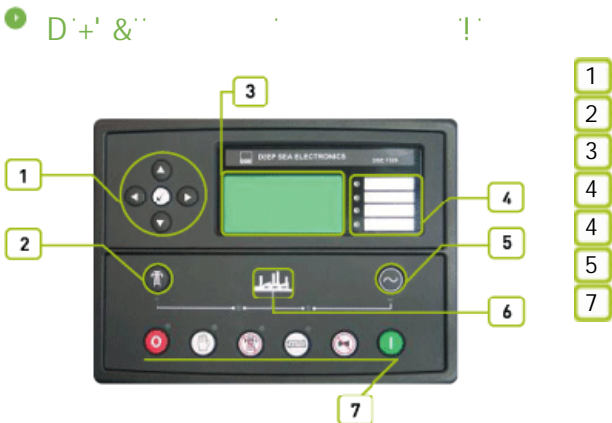

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&(

"

%, !&*\$

&(\$)

ž

ž

ž

"

"

