

ABG 8

Briggs&Stratton
Mecc Alte
P 70



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	
2000/14/EC	&\$\$#/(#

! ž \$ < nž 7 cg 1 \$ž

	"	"	"	"	
400/230	8.00	6.40	6.00	4.80	8.00

fP G D E GC ;) & z f D F D L z & (GC " \$ (* "

Standart Specification

- Naturalgas engine
- Air cooled engine
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Base frame design vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger for Automatic gensets
- Manual for use and installation

CONTROL SYSTEM

ABG 8

Briggs&Stratton
Mecc Alte
P 70

1

Manufacturer	Briggs&Stratton	
Model	Vanguard	
	1500 d/dk	, "\$ "Q DQ
	L	0.4800
		68X66
		9:1
	fl # L	rpm
		3000
Fuel Consumption	m ³ /h.	3,3
Gas Pressure	mbar	17-20
Oil Capacity	L	2
Absorbed Air Discharge	m ³ /dk.	1
	m ³ /dk.	2
	° C	500
Emitted Heat	"	4

2

Manufacturer	Mecc Alte	
	T/6F-160/A	
	"	8
Cos fi	1	
	3	
	400/230	
5_ia	A	10
Temperatur	H	1


3

	"	"	"	"
	110	880	620	690
	"	"	"	"
	205	1450	680	780

ABG 8

Briggs&Stratton
Mecc Alte
P 70

● D'+'\$!' :

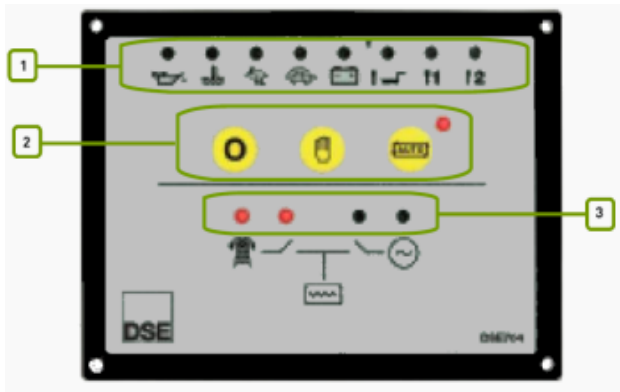

- 1
- 2
- 3

● Devices

- DSE, model 704 Auto Mains Failure control module
- Voltmetre, 0 - 500 Vac, 72 x 72 mm
- Ammeter, 72 x 72 mm
- Hour runmeter,
- Static battery charger 5A, 220/240 volt
- Emergency stop push button and fuses for control circuits
- Mains and Generator transfer contactors between electrical lock with load terminals

● Structure And Paint

- Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

● Montage

- Control panel is separate from generating set and wall (installing) type
- Control cables is connected between genset and control panel.

● Generator Control Unit

Microprocessor controlled
LED indicators,
Transfer between mains (utility) and generator power
On-site module configuration
User-friendly set-up and button layout
Front panel programming
Remote start
Controls: Stop/Reset, Manual, Auto, buttons.

ABG 8

Briggs&Stratton
Mecc Alte
P 70

Indicator

- ENGINE
- Run time
- GENERATOR
- Voltage (L-L)
- Current (L-L)

Optional Properties

- High oil temperature, shutdown
- Low fuel level, shutdown
- Low fuel level, alarm
- High fuel level, alarm
- Low coolant level, shutdown

Electronic Charge Equipment

6UHfYfmVXUf[Yf'jg'a Ubi ZVWf fYX'k]h'gk]hW'jb[!a cXY'UbX'GA 8 'hVWbc'c[mUbX'ih\Ug'\] \ YZVbVWf
 6UHfYfmVXUf[Yf'a cXY'gfci hdi hJ !=VXUfUVWf]g]hW]g] YfmVWcgY hc'gei UfY'UbX'ci hdi h]g') 'Ua dYfz%&j c'h87'"-edi h% , '!
 &*\$'j c'h57"
 %&\$) '\Ug'Z `mci hdi hg\chVfW]hdfchVW]cb'UbX'ihWUb'VY'i gYX'Ug'U'W'ffYbhgci fW"
 %&\$) 'VXUf[Yf'\Ug'\] \ YZVbVWf'cb["jZ'Z'ck ZU]i fY'fUfYz'] [\hk Y] [\hUbX'ck '\YUhfUX]UfYX']b'UWV'fXUbW' k]h' "]bYUf
 U'fYfbU'hj Yg"
 H\Y'VXUf[Yf'jg'Z'hYX'k]h' U'dfchVW]cb'X]cXY'UVW'cgg'hY'ci hdi h'
 7\Uf[Y'ZU] 'ci hdi h]g'Uj U]UV'Y'"7 cbbYVWVXUf[Y'ZU] 'fY'UmV'Z' '\YfK'YYb'dcg]h] Y'ci hdi hUbX'7: 'ci hdi h'

Protection

- WARNING
- Battery charge failure
- SHUTDOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- Under/over speed

Standards

- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard for the industrial environment

ABG 8

Briggs&Stratton
Mecc Alte
P 70

5? G%+!'



1

fj !&+) 7

ž

ž

1

ž

ž

ž

ž

		AKS 17
	mm.	680
	mm.	1450
	mm.	780