

# AC 1540-6

Cummins  
Stamford  
D+ &




<b>ISO8528</b>	...	...	...	...	...	GC ; ) &
<b>SZUTEST</b>	...	...	...	...	...	GC - \$\$\$
<b>CE</b>	...	...	...	...	...	

**2000/14/EC** & \$\$\$#( #  
 z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		1540,00		1288,00	1936,00
380/220		1540,00		1288,00	2446,00
208/120		1540,00		1288,00	2234,00

Standard Specifications


Standard Specifications

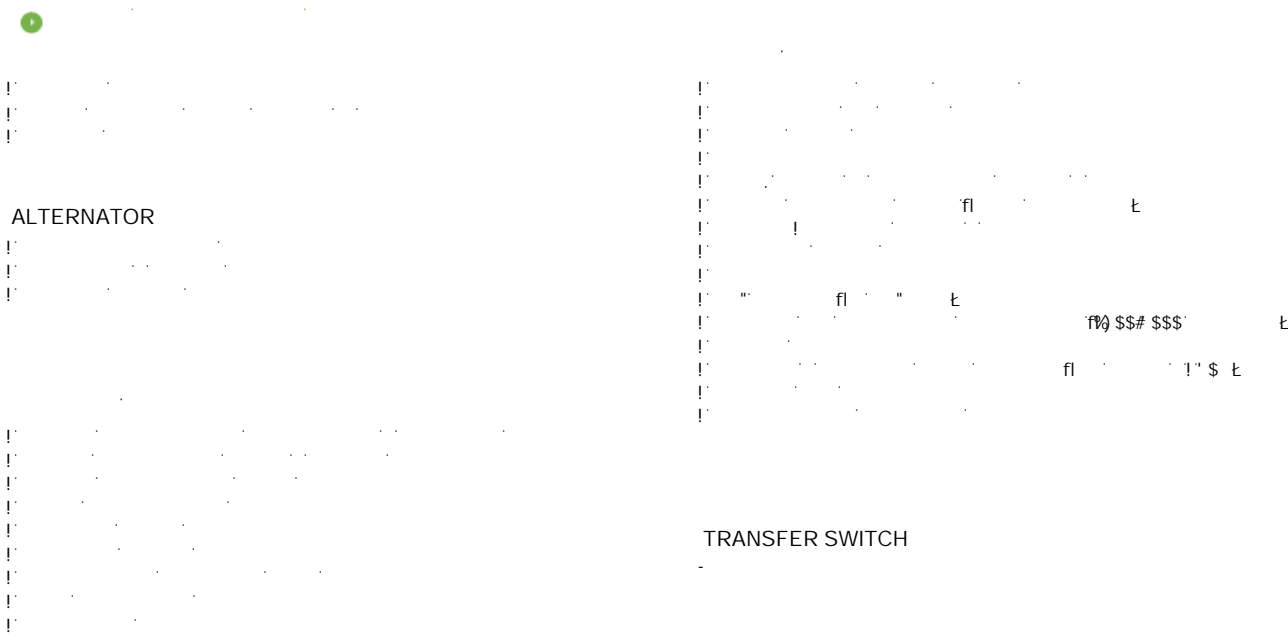

Manufacturer		Cummins		
Model		KTA 50-G9		
	L	50,30		
	"	159 X 159		
		13,9:1		
fl # Ł	"# "	1800		
fl "Ł	L	204,00		
	L	643,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	124,50		
	' # "	301,00		
	° C	515		
		24 V d.c.		
	Load	%"\$!i	'+) i	) \$i
	# "			
		330,00	257,00	180,00

		Stamford		
		PI 734E		
	Hz	60		
	"	1840		
7 cg'		0,80		
		3		
fl Ł		480/277		
	A	2766		
Temperatur		H		

		fl "Ł		fl "Ł	
	"	"	"	"	L
AC 1540-6	10700	5650	2150	2550	2000
		fl "Ł		fl "Ł	
	"	"	"	"	L
AKS 101	16700	9130	2440	2591	1200

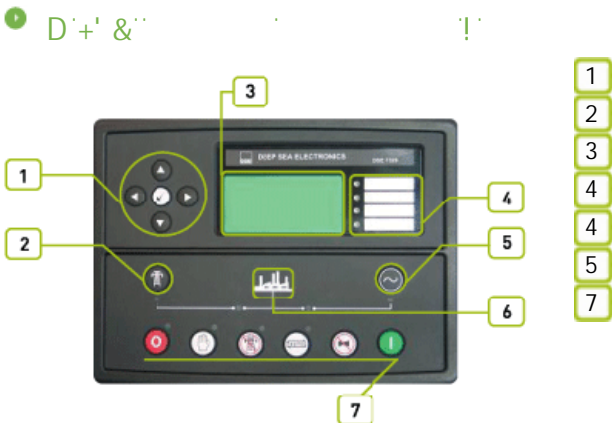





f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B'\*\$-\$) \$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

#



ž

%, !&\* \$

&(\$)

ž

ž

GA 8

!&(

ž

5?G`%\$%!`



F5@- \$\$%\$`  
-GC`%\$\*%`

5?G`%\$\$/ 5?G`%\$%`

`&\$\$\$#/#` "

	"	2440
fl "L	"	9130
fl "L	"	2591
		1200