




ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC &\$\$#(#
z*\$ z'%\$D:

	"	"	"	"	Amp
480/277		101,00		91,00	136,00
380/220		100,00		90,00	190,00
208/120		100,00		90,00	343,00

Standard Specifications

(*\$ \$S

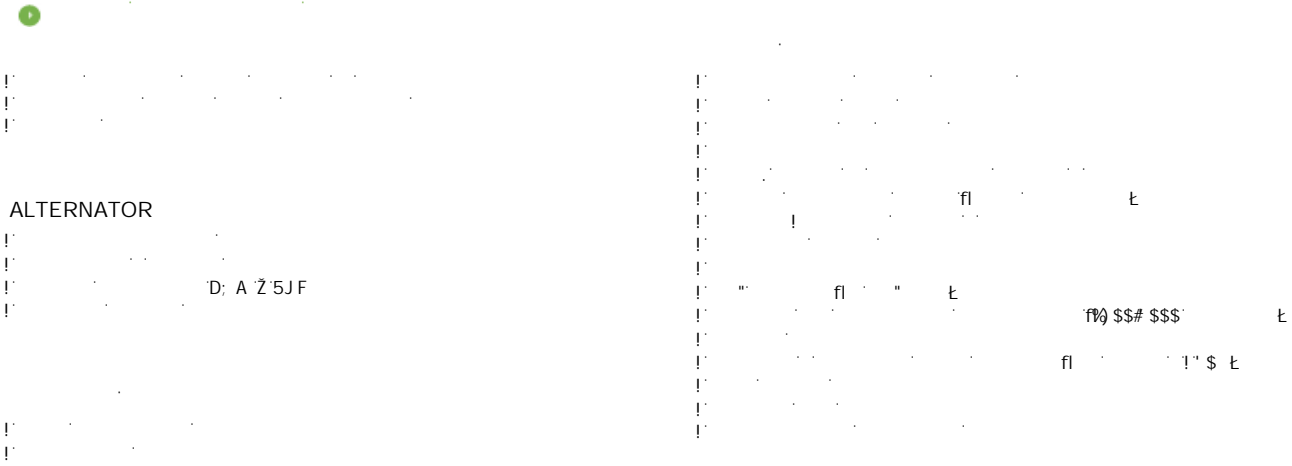

TRANSFER SWITCH




Manufacturer		John Deere		
Model		4045 HF275		
Epa		TIER II		
	L	4,50		
	"	106 X 127		
		17.0:1		
	fl # ı	"# "	1800	
	fl ı	L	13,00	
		L	30,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	8,80		
	' # "	23,80		
	° C	568		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "	27,00	21,00	14,30

		Stamford		
		UCI 274D		
	Hz	60		
	"	116		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	174		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 101-6	1285	2150	1020	1550	215
		fl ı		fl ı	
	"	"	"	"	L
ASM 5	1745	3110	1060	1750	215

1 D'+&''

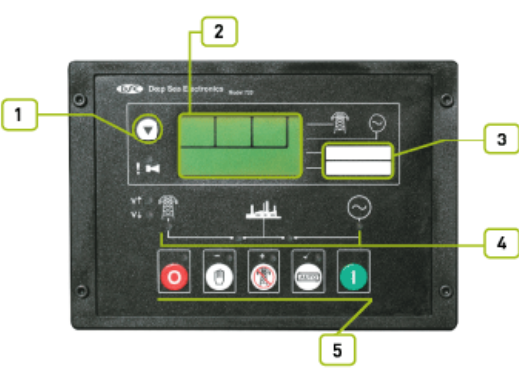

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

8G9'+&\$

fl

ł

ž

fl

%%\$

ł

#

ž

ž

ž

ž

"

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&*\$

%)

ž

ž

ž

AJD 101-6

John Deere
Stamford
D+&

5GA 1



f) !&+)

ž

ž

ž

ž

ž

ž

ž

	"	1060
f) "ž	"	3110
f) "ž	"	1750
		215