

AJD 101-U

John Deere
Stamford
D+&T



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z*\$ z'%'\$D:

	"	"	"	"	Amp
480/277		101,00		91,00	136,00
380/220		100,00		90,00	190,00
208/120		100,00		90,00	343,00

fPGDL

GC ;) &

) & z

rDF DL

%\$i

%

%&

GC" \$(**

z&(

GC

Standard Specifications

(*#\$\$S

z


fl

!

E

z

z

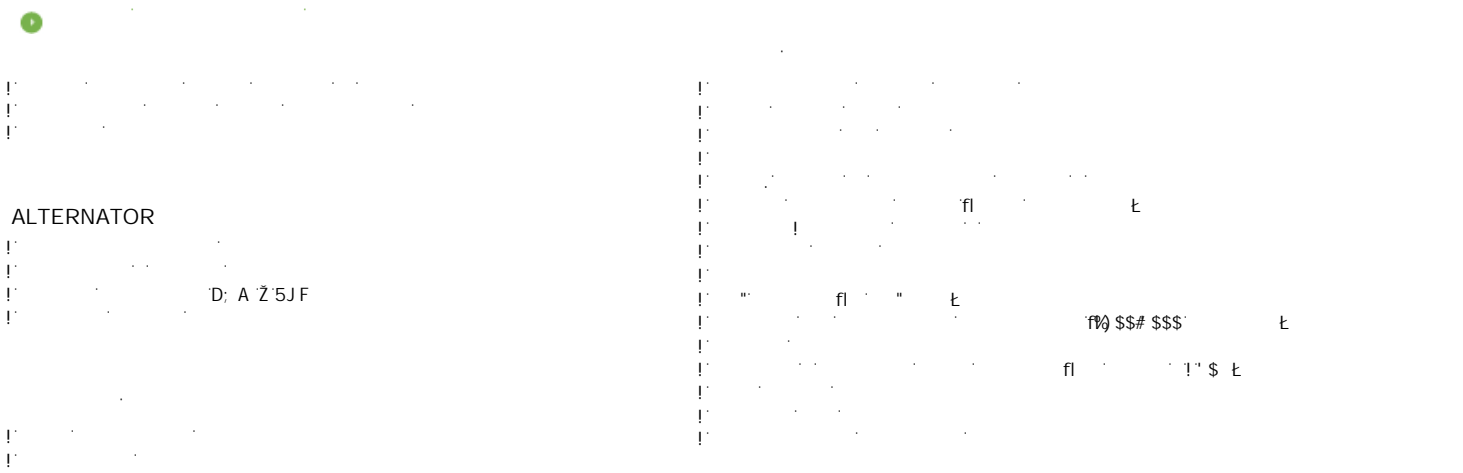

TRANSFER SWITCH




Manufacturer		John Deere		
Model		4045 HF 285		
Epa		TIER III		
	L	4,50		
	"	106 X 127		
		19.0:1		
	fl # ı	"# "	1800	
	fl ı	L	13,00	
		L	30,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	8,80		
	' # "	22,80		
	° C	580		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "	28,50	22,80	16,30

		Stamford		
		UCI 274d		
	Hz	60		
	"	116		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	174		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 101-U	1295	2150	1020	1550	215
		fl ı		fl ı	
	"	"	"	"	L
ASM 5	1755	3110	1060	1750	215

1 D'+&''

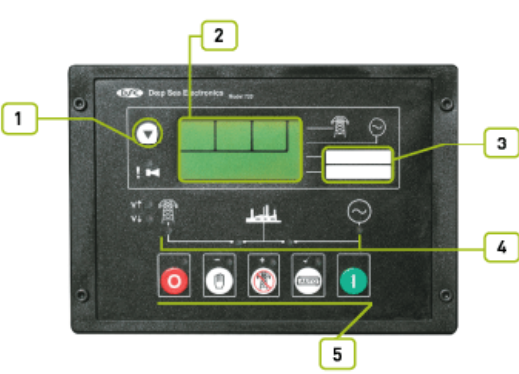

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

8G9'+&\$

fl

ł

ž

fl

%\$\$

ł

#

ž

ž

ž

ž

"

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*!&
6G'9B *%\$\$!*!(

GA 8

%, !&* \$

%&\$)

ž

ž

!%&

"

ž

5GA) !



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9

	"	1060
fl "Ł	"	3110
fl "Ł	"	1750
		215