



<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

**2000/14/EC** & \$\$\$#( #  
 z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		624,00		570,00	857,00
380/220		592,00		538,00	1022,00
208/120		624,00		570,00	1978,00

Standard Specifications


(\*) \$ \$ S



Manufacturer		Doosan		
Model		P2221E-5		
	L	21,93		
	"	128x142		
		15:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	40,00	
		L	113,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	47,10		
	' # "	130,00		
	° C	548		
		24 V d.c.		
	Load	%"\$!ı	'+)ı	)\$ı
	# "			
		154,00	115,00	77,00

		Stamford
		HCI544F
	Hz	60
	"	660
7 cg'		0,80
		3
	fl Ł	480/277
	A	992
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
AD 624-6	4400	3700	1400	2200	730
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 85	6060	5800	1620	2550	1150

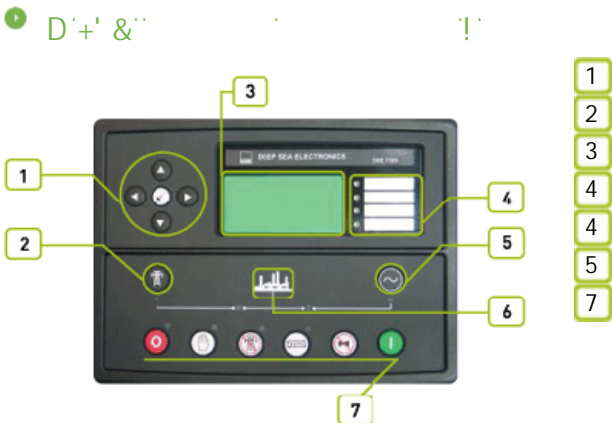





5? , ) !'



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9
- 10

1

" f1 \$\$\$! '%&\$\$' Ł

ž ž " "

1

ž ž ž ž

'&\$\$\$#/(# "

	"	1620
f1 "Ł	"	5800
f1 "Ł	"	2550
		1150