

AC 175

Cummins
Mecc Alte
D+&''



ISO8528

GC ;) &-

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z) \$' z'z' D:

	"	"	"	"	Amp
400/230	175,00	140,00	160,00	128,00	230,00

fPGL

GC ;) &

) & z

fDF DL

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

!

z

ALTERNATOR

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

TRANSFER SWITCH

!

!

!

!

!

!

!

AC 175

Cummins
Mecc Alte
D+&

Manufacturer		Cummins		
Model		6BTAA 5,9-G5		
		% \$ \$	"# "	
		%* \$	"	
		Q% < DQ		
	L	5,90		
	"	102 x 120		
		16,5:1		
	fl # ı	"# "	1500	
	fl ı	L	16,40	
		L	26,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	12,00		
	' # "	138		
	' # "	32,00		
	° C	533		
		12 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "	37,00	29,00	19,00


		Mecc Alte		
		ECO 38-1SN		
	Hz	50		
	"	180		
7 cg		0,80		
		3		
	fl ı	400/230		
	A	259		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 175	1470	2300	1150	1700	380
		fl ı		fl ı	
	"	"	"	"	L
AK 50	1850	3250	1160	1900	

AC 175

Cummins
Mecc Alte
D+&''

1 D+&''

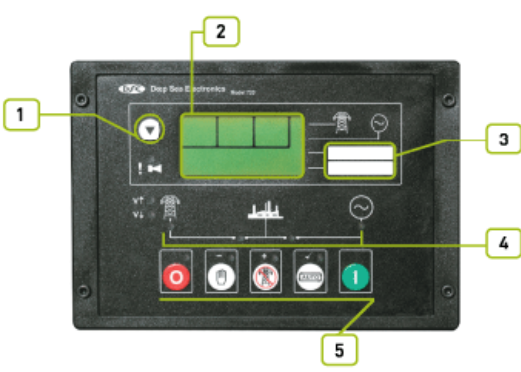

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$ 8G9'+&\$ fl
 &\$ ž fl
 8G9'+&\$ ž "

fl ž fl %\$\$

ž ž ž ž "

AC 175

Cummins
Mecc Alte
D+&''

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

%, !&* \$

%&\$)

ž

ž

!%&


"

ž

AC 175

Cummins
Mecc Alte
D+&''

5?) \$!

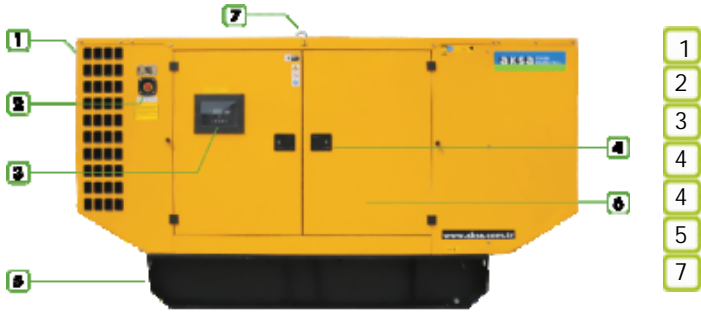

1

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

2

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

1160 mm (45.7 in) 3250 mm (127.9 in) 1900 mm (74.8 in)

	"	1160
fl "L	"	3250
fl "L	"	1900