

APD 145 C

Cummins
Akso
D+&''



ISO8528	GC ;) &-
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC
 &\$\$\$#(#
 z) \$ z'z' D:

	"	"	"	"	Amp
400/230	145,00	116,00	132,00	105,00	190,00

rfpGDE GC ;) &''
 rDF DE %Si % %& GC \$(** z&(GC

Standard Specifications

(*#\$\$
 fl ! E
 z
 z

! ! ! ! !
 ! ! ! ! !
 ! ! ! ! !
 ! ! ! ! !

ALTERNATOR

! ! ! ! !
 ! ! ! ! !
 ! ! ! ! !
 ! ! ! ! !

TRANSFER SWITCH

! ! ! ! !

APD 145 C

Cummins
Aksa D+&




Manufacturer		Cummins
Model		6 BTAA 5,9-G2
		%\$\$ "# "
		%& " "
		0%+< DQ
	L	5,90
	"	102 X 120
		17,5:1
	fl # 7	"# " 1500
	fl 7	L 16,50
	L	27,00
AbsorbedAirDischargeReSourceKey.Text	' # "	9,00
	' # "	148
	' # "	25,00
		24 V d.c.
	Load	%%\$1
	# "	
		30,00

		Aksa
	Hz	50
7 cg		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 145 C	1340	2260	1000	1500	195
		fl 7		fl 7	
	"	"	"	"	L
APD 145 C	1820	3380	1070	1770	

D+&

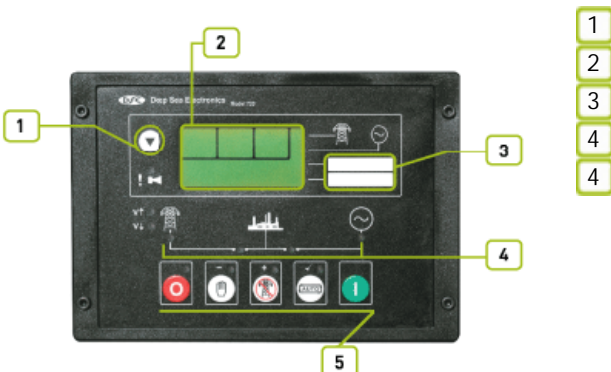

APD 145 C

Cummins
Aksa
D+&



- 1 8G9ž +&\$ž) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+&\$ 8G9'+&\$ ž fl
- 5 8G9'+&\$ ž
- 6 fl ž fl %&\$
- 7 ž ž ž ž ž
- 8 # ž ž ž ž ž

APD 145 C

Cummins
Aksa
D+&''



f@Bt
f@%&@t
f@z@Bt

#

#

6G'9B *\$-\$) '\$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&*\$

%)

ž

ž

ž

ž

APD 145 C

Cummins
Aksa
D+&



5D8 %() '7 !'

1

f) !&+)

7

ž

ž

2

ž

ž

ž

ž

	"	1070
f) 7	"	3380
f) 7	"	1770