



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

! ž \$<nž7 cg' 1 '\$ž

	"	"	"	"	Amp
480/277		62,00		56,00	84,00
380/220		62,00		56,00	
208/120		62,00		56,00	106,00

fPGDL

=GC ,) &

) & ž

fDFDL

%\$!

%

%&

=GC " \$(**

ž&(

=GC

(*#\$\$s

ž

fl

!

E

ž

ž

ENGINE

OTHER ACCESSORIES

ALTERNATOR

fl E

CONTROL SYSTEM

TRANSFER SWITCH

1

Manufacturer		John Deere		
Model		4045 TF 270		
Epa		TIER II		
	L	4,50		
	"	106 X 127		
		17.0:1		
	fl # ı	"# "	1800	
	fl ı	L	13,20	
		L	21,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	6,00		
	' # "	15,80		
	° C	545		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "	17,50	13,60	9,60


2

		Stamford		
		UCI 224F		
	Hz	60		
	"	78		
7cg		0,80		
		3		
	fl ı	480/277		
	A	117		
Temperatur		H		
		– UXia		

3

Open Type		fl ı		fl ı	
	"	"	"	"	L
AJD 62-6	1050	2150	1020	1530	215
		fl ı		fl ı	
	"	"	"	"	L
ASM 5	1510	3110	1060	1750	215

1 D+&T

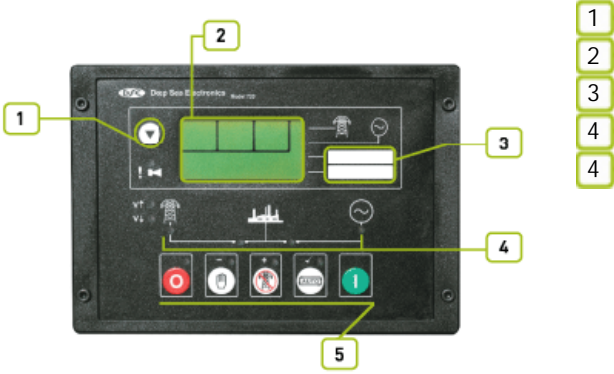

2 8G9Ž +&\$Ž) 5Ž&&\$#(&(\$

3 [Faint, illegible text]

4 [Faint, illegible text]

5 8G9'+&\$ 8G9'+&\$ 'fl
) \$ Ę 'fl
8G9'+ &\$ ž 'fl
%\$\$
Ž Ž Ž Ž

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$\$!*&
6G'9B *%\$\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

5GA 1



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9

2

Technical specifications and performance data for the generator, including power ratings and efficiency metrics.

3

Additional technical details, safety instructions, and maintenance requirements for the generator.

	"	1060
fl "L	"	3110
fl "L	"	1750
		215