

ACQ 801-6

Cummins
Stamford
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$%



2000/14/EC

&\$\$S#(#

! : Uniz* \$<nž; : 'Šž

	"	"	"	"	Amp
480/277		800,00		728,00	1094,00
380/220		800,00		726,00	1379,00
208/120		800,00		728,00	2526,00

fDGDE

=GC ;) &

) & ž

rDF DE

%\$i

%

%&

=GC " \$(**

ž&(

=GC

Standard Specifications

(*# \$S

ž

fl

!

E

ž

ALTERNATOR


TRANSFER SWITCH

Manufacturer		Cummins		
Model		QSK 23-63		
	L	23,15		
	"	170 X 170		
		16,0:1		
	fl # ı	"# "	1800	
	fl ı	L	103,00	
		L	160,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	68,00		
	' # "	183,00		
	° C	514		
		24 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		189,00	139,00	97,00

		Stamford		
		HCI 634H		
	Hz	60		
	"	900		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	1353		
Temperatur		H		
		&# 'UXia		

		fl ı		fl ı	
	"	"	"	"	L
ACQ 801-6	6530	4250	1710	2200	1100
		fl ı		fl ı	
	"	"	"	"	L
AK 90	9430	6500	2260	2350	1100

1 D+' &'

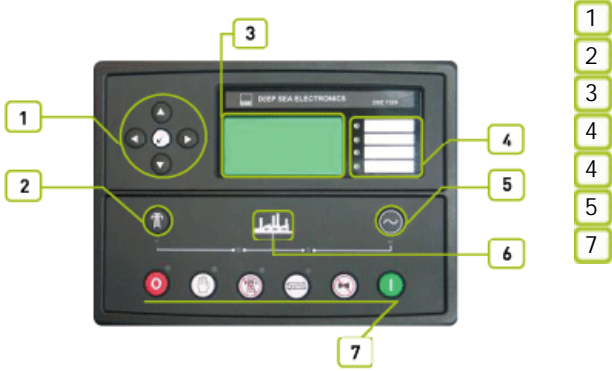

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

"8G9+' &\$ž &)' ž ž "8G9+' &\$ž "8G9+' &\$ž " % &1 '*(' žFG&' &žFG(,) ž

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&%) \$L

GA 8

"

%, !&*\$

"

&(\$)

ž

ž

!&(

"

ž

ž

"

"

