

# ACQ 1000-6

Cummins  
Stamford  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$( #

z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		1000,00		920,00	1383,00
380/220		924,00		840,00	1595,00
208/120		1000,00		920,00	3192,00

fPGDE

GC, ) &

) & z

rDF DE

% % &

GC" \$(\*\*

z&(

GC


ALTERNATOR

TRANSFER SWITCH

Manufacturer		Cummins		
Model		QST 30 - G4		
	L	30,50		
	"	140 X 165		
		14,0:1		
fl # Ł	"# "	1800		
fl "Ł	L	154,00		
	L	342,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	80,50		
	' # "	220,00		
	° C	525		
		24 V d.c.		
	Load	%%\$İ	'+) İ	) \$İ
	# "			
		240,00	177,00	119,00

		Stamford
		HCI 634 K
	Hz	60
	"	1150
7 cg'		0,80
		3
fl Ł		480/277
	A	1729
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
ACQ 1000-6	7750	4500	1770	2350	1250
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 96	11650	7500	2360	2500	1500

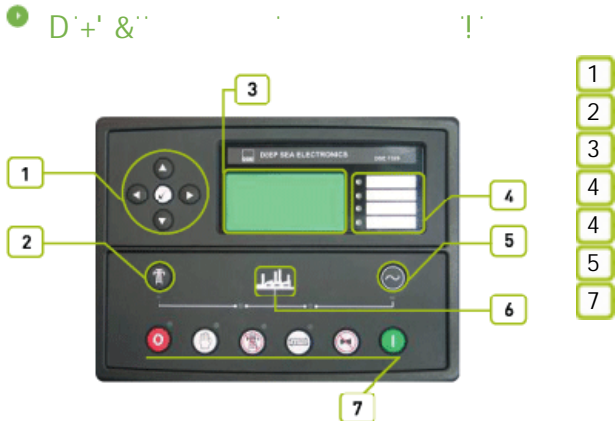

1

'8G9ž ' + &\$ž ) 5ž&&\$#&(\$

1

1

1

'8G9'+' &\$ fi  
&)' ž  
"8G9'+' &\$  
'8G9'+' &\$  
ž  
% &I '\*(' ž  
žFG&' &žFG(, ) ž  
ž

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G9B\*\*\$-)\$

6G9B\*\*%\$\$\$!\*!&

6G9B\*\*%\$\$\$!\*!(

f&)(, t  
f&%) +t  
f&% \$t

GA 8

!&(

"

&(\$)

ž

ž

ž

ž



- 1
- 2
- 3
- 4
- 4
- 5
- 7

	"	2360
fı "L	"	7500
fı "L	"	2500
		1500