

ACQ 800-6

Cummins
Stamford
D+ &



ISO8528	GC ;) &
SZUTEST	GC - \$\$%
CE	

2000/14/EC &\$\$#(#

! : Uniz* \$<nž; : 'Šž

	"	"	"	"	Amp
480/277		800,00		724,00	1088,00
380/220		704,00		640,00	1215,00
208/120		770,00		700,00	2429,00

! : Uniz* \$<nž; : 'Šž

Standard Specifications

(* # \$ \$ S

! : Uniz* \$<nž; : 'Šž

ALTERNATOR

! : Uniz* \$<nž; : 'Šž

TRANSFER SWITCH


! : Uniz* \$<nž; : 'Šž

Manufacturer		Cummins		
Model		QSK 23-G3		
	L	23,15		
	"	170 X 170		
		16,0:1		
	fl # ı	"# "	1800	
	fl "ı	L	103,00	
		L	160,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	68,00		
	' # "	183,00		
	° C	514		
		24 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		189,00	139,00	97,00

		Stamford		
		HCI 634 G		
	Hz	60		
	"	800		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	1202		
Temperatur		H		
		&# 'UXia		

		fl "ı		fl "ı	
	"	"	"	"	L
ACQ 800-6	6390	4250	1710	2200	1100
		fl "ı		fl "ı	
	"	"	"	"	L
AK 90	9300	6500	2260	2350	1100

1 D+' &'

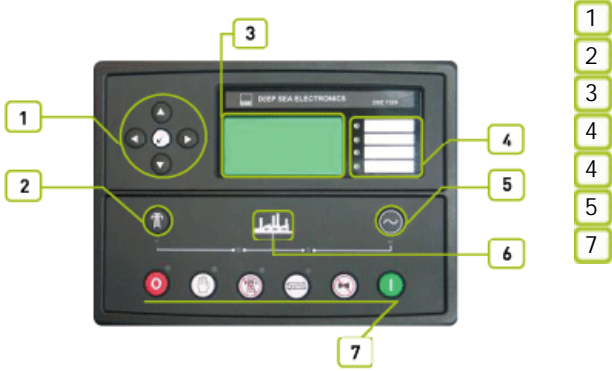

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

"8G9+' &\$ž &)' ž ž "8G9+' &\$ž "8G9+' &\$ž " % &1 '*(' žFG&' &žFG(,) ž

