



ISO8528

GC ;) &

SZUTEST

GC - \$\$%

CE

2000/14/EC

&\$\$#/#

u i j ; ' W z ' ! : Un i z * \$ < n z ; : ' % \$

	"	"	"	"	Amp
480/277		900,00		830,00	1248,00
380/220		825,00		750,00	1425,00
208/120		900,00		820,00	2845,00

fP G D E

=GC ;) &

"

) & z

r D F D E

% \$ i

% % &

=GC " \$ (* "

z & (

=GC

Standard Specifications

(* # \$ %

z

f l

!

z

ALTERNATOR


TRANSFER SWITCH

Manufacturer		Cummins		
Model		QST 30-G3		
	L	3,50		
	"	140 X 165		
		14:1		
fl # ı	"# "	1800		
fl "ı	L	154,00		
	L	190,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	76,20		
	' # "	197,00		
	° C	481		
		24 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		207,00	154,00	106,00

		Stamford
		HCI 634H
	Hz	60
	"	900
7 cg'		0,80
		3
fl ı		480/277
	A	1353
Temperatur		H
		&#' UXia

		fl "ı		fl "ı	
	"	"	"	"	L
ACQ 900-6	7200	4200	1770	2350	1250
		fl "ı		fl "ı	
	"	"	"	"	L
AK 96	11100	7500	2360	2500	1500

1 D+' &'

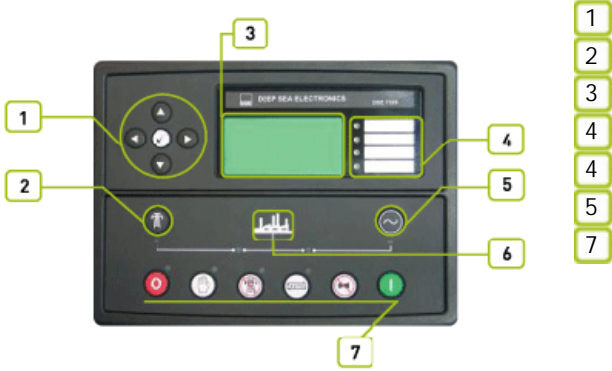

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

"8G9+' &\$ž &)' ž ž "8G9+' &\$ž "8G9+' &\$ž " % &1 '*(' žFG&' &žFG(,) ž



f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

#



ž

%, !&*\$

&(\$)

ž

ž

GA 8

!&(

ž

