




<b>ISO8528</b>	...	...	...	...	GC ; ) &
<b>SZUTEST</b>	...	...	...	...	GC - \$\$\$
<b>CE</b>	...	...	...	...	

**2000/14/EC** &\$\$\$( #  
 z\* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		901,00		830,00	1248,00
380/220		900,00		830,00	1576,00
208/120		900,00		830,00	2880,00

Standard Specifications


( \* # \$ \$ S

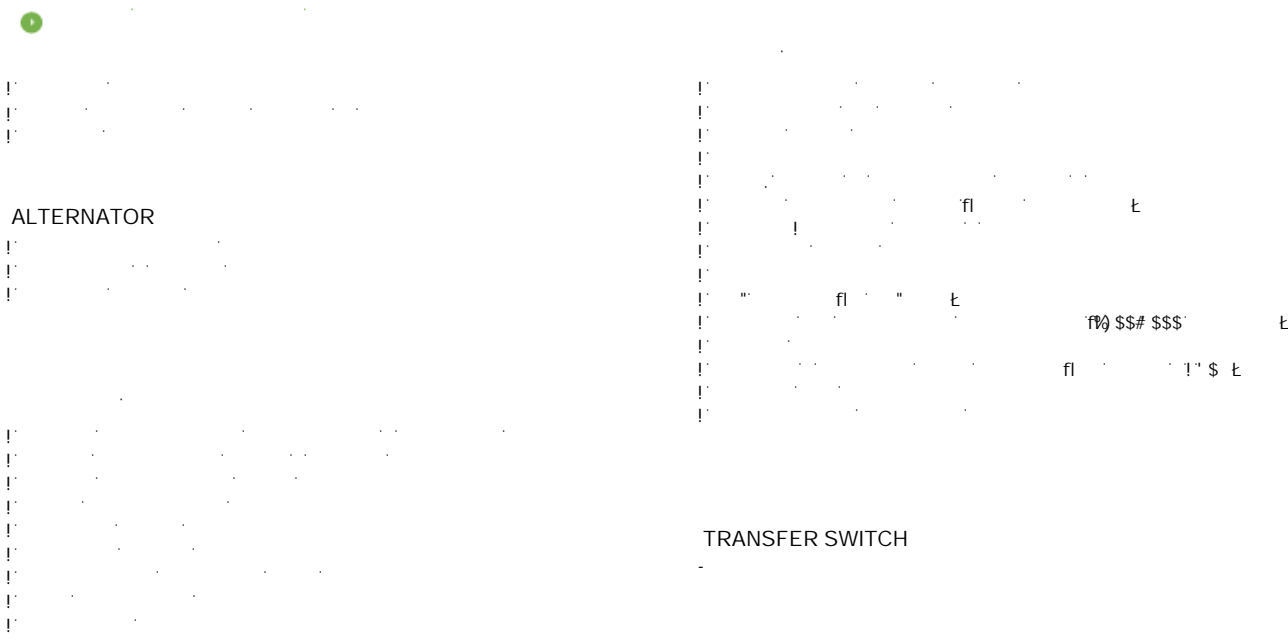

Manufacturer		Cummins		
Model		QST 30 - G3		
	L	30,50		
	"	140 X 165		
		14,0:1		
fl # Ł	"# "	1800		
fl "Ł	L	154,00		
	L	190,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	76,20		
	' # "	197,00		
	° C	481		
		24 V d.c.		
	Load	%\$ \$i	'+) i	) \$i
	# "			
		207,00	154,00	106,00

		Stamford
		HCl 634 J
	Hz	60
	"	1040
7 cg'		0,80
		3
fl Ł		480/277
	A	1563
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
ACQ 901-6	7400	4400	1770	2350	1250
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 96	11300	7500	2360	2500	1500

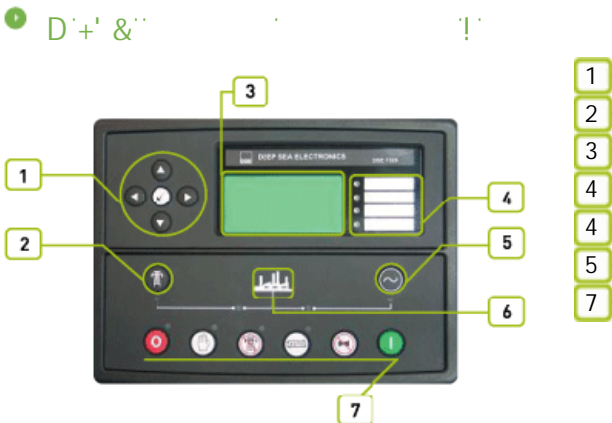

- 1. '8G9ž + ' &\$ž )5ž&&\$#&(\$
- 2.
- 3.
- 4. '8G9+' &\$' &\$' 'fi  
)\$' ž "" '8G9+' &\$' '8G9+' &\$'  
ž "
- 5. % &'\*(  
žFG&' &žFG(,) ž

f@z@Bl  
f%&!@ t

" z " z "

f@z@Bl

971

#

#

#

#

#

6G'9B \*\$-\$)

6G'9B \*%\$\$\$!\*!&

6G'9B \*%\$\$\$!\*!(

f&%) +t

f&)(, t

f&%) \$t

GA 8

%, !&\* \$

)  
&(\$)

ž

ž

!&('

"

ž

ž

"

"

# ACQ 901-6

Cummins  
Stamford  
D+ &''

5? - \* !'



6

fl \$\$! %&\$ \$ E

ž

ž

7

ž

ž

ž

ž

ž

'&\$ \$\$#% # "

	"	2360
fl "ž	"	7500
fl "ž	"	2500
		1500