

AC 1272-6

Cummins
Stamford
D+ &



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z* \$ z' % \$ D:


	"	"	"	"	Amp
480/277		1272,00		1128,00	1696,00
380/220		1272,00		1124,00	2135,00
208/120		1272,00		1124,00	1950,00

Standard Specifications

z

fl ! E


z

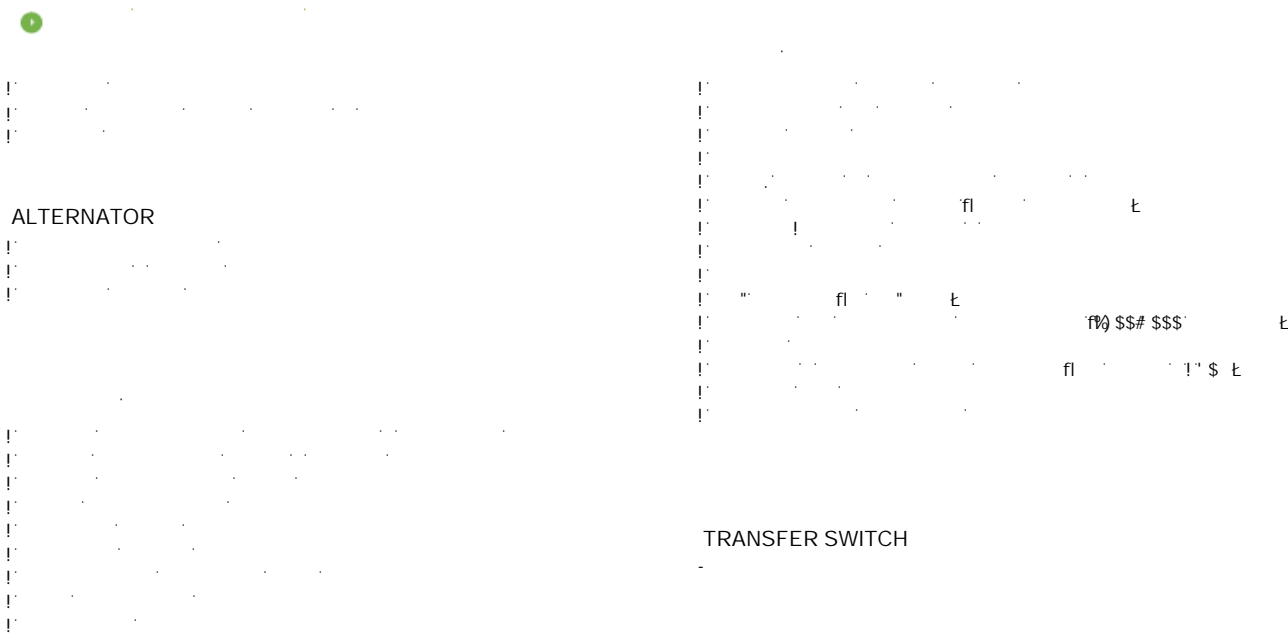

Manufacturer		Cummins		
Model		KTA 50 G3		
	L	50,30		
	"	159 X 159		
		13,9:1		
	fl # ı	"# "	1800	
	fl "ı	L	177,00	
		L	410,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	110,50		
	' # "	258,00		
	° C	475		
		24 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		291,00	222,00	157,00

		Stamford
		PI 734 C
	Hz	60
	"	1512
7cg'		0,80
		3
	fl ı	480/277
	A	2272
Temperatur		H

		fl "ı		fl "ı	
	"	"	"	"	L
AC 1272-6	10000	4960	2120	2450	2000
		fl "ı		fl "ı	
	"	"	"	"	L
AKS 100	15000	9130	2300	2470	1200

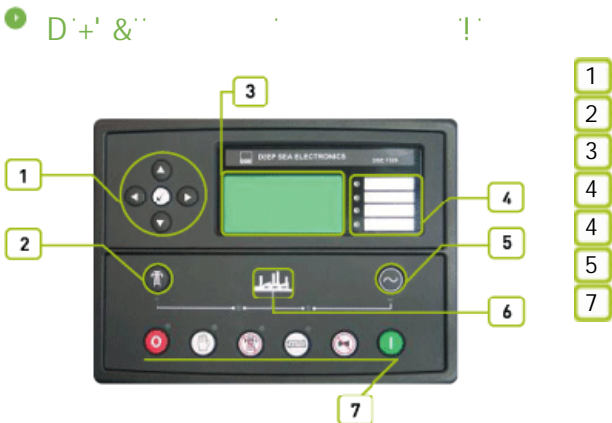

f@z@Bl
f@z@Bl

"z" "z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

"

%, !&* \$

"

)
&(\$)

ž

ž

!&(

"

ž

ž

"

"

5?G`%\$\$!



1

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

"

F5@- \$\$
-GC`%%*%

5?G`%\$\$/ 5?G`%\$\$

\$\$\$#/# "

	"	2300
fl "L	"	9130
fl "L	"	2470
		1200