



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		1001,00		925,00	1390,00
380/220		1000,00		925,00	1757,00
208/120		1000,00		925,00	3210,00

fPGDE

=GC ;) &

) & z

rDF DE

%\$i

%

%&

=GC " \$(**

z&(

=GC

Standard Specifications


(*# \$ \$

z

fl

!


z

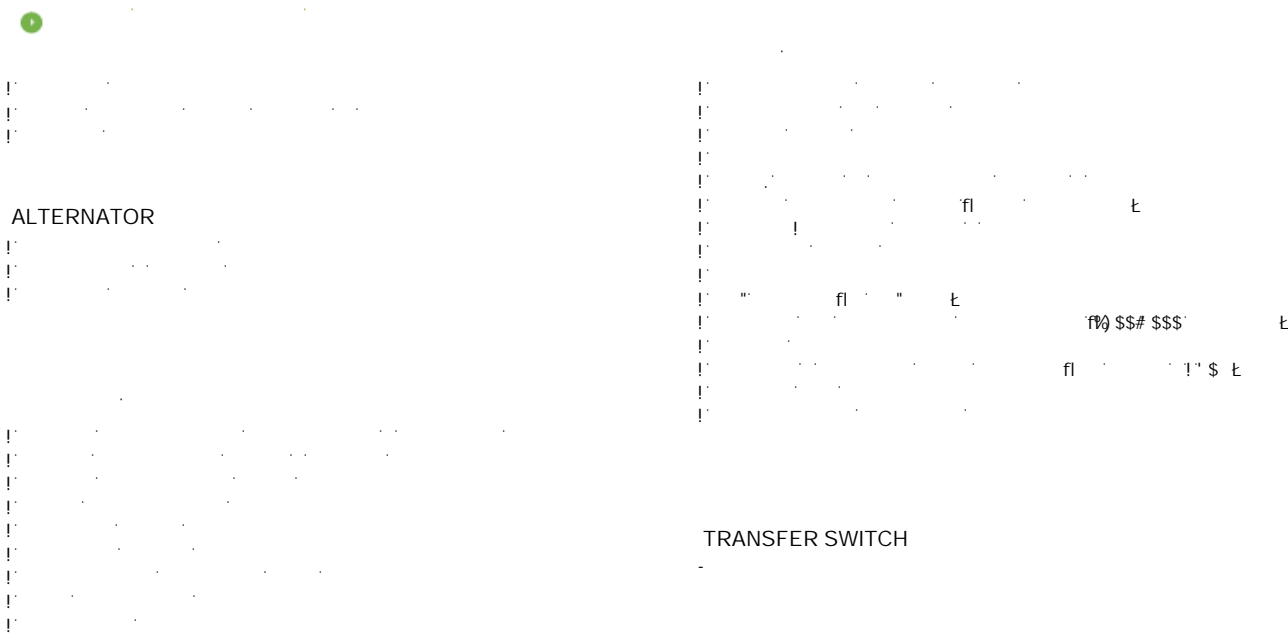

Manufacturer		Cummins		
Model		QST 30 - G4		
	L	30,50		
	"	140 X 165		
		14,0:1		
fl # Ł	"# "	1800		
fl "Ł	L	154,00		
	L	342,00		
AbsorbedAirDischargeReSourceKey.Text	' # "	80,50		
	' # "	220,00		
	° C	525		
		24 V d.c.		
	Load	%"\$!ı	'+)ı)\$ı
	# "			
		240,00	177,00	119,00

		Stamford
		HCl 634 J
	Hz	60
	"	1040
7 cg'		0,80
		3
fl Ł		480/277
	A	1563
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
ACQ 1001-6	7500	4400	1770	2350	1250
		fl "Ł		fl "Ł	
	"	"	"	"	L
AK 96	11500	7500	2360	2500	1500

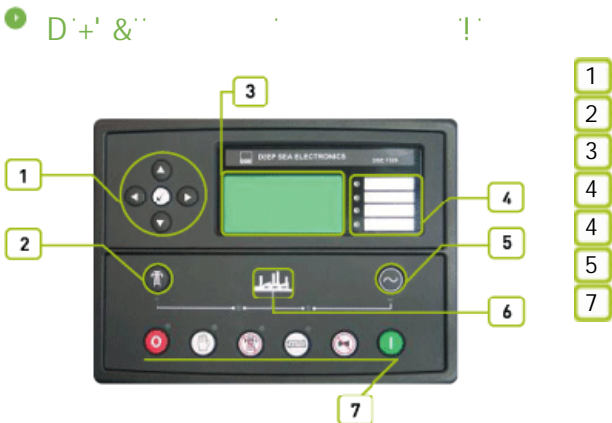

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&%) \$L

GA 8

%, !&*\$

&(\$)

ž

ž

!&('

"

ž

ž

"

"

